
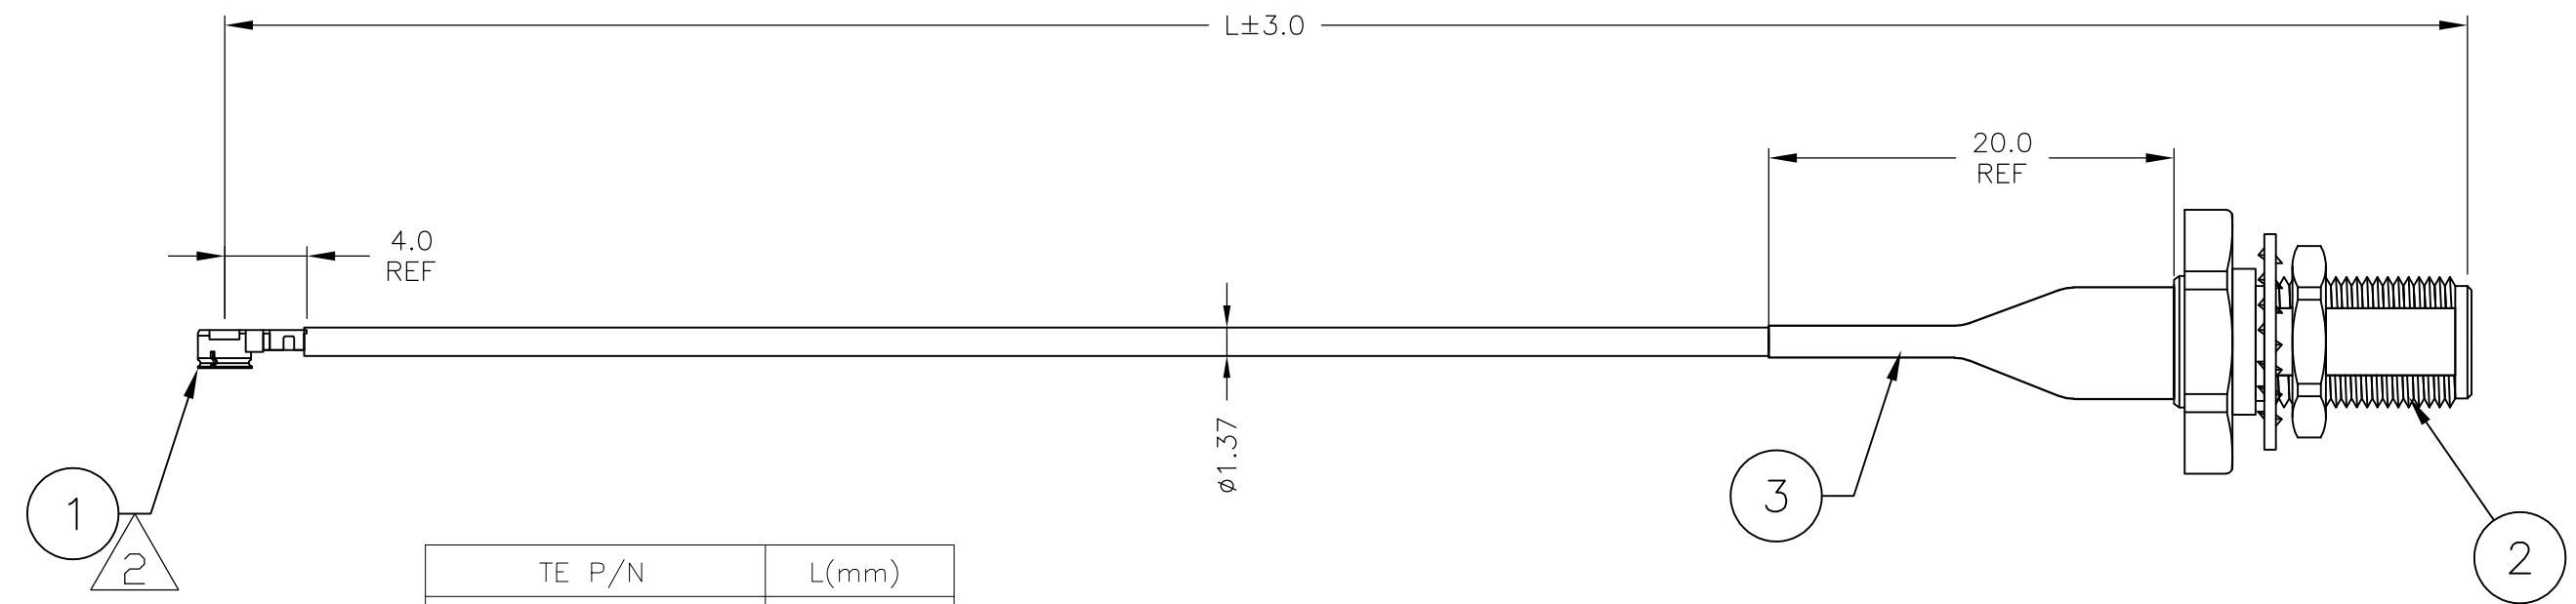


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		NEW DASH NUMBER ADDED	10SEP2015	BY	VW

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.
2. HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR, TYPE III
3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100ms VSWR: 1.5:1 MAX.

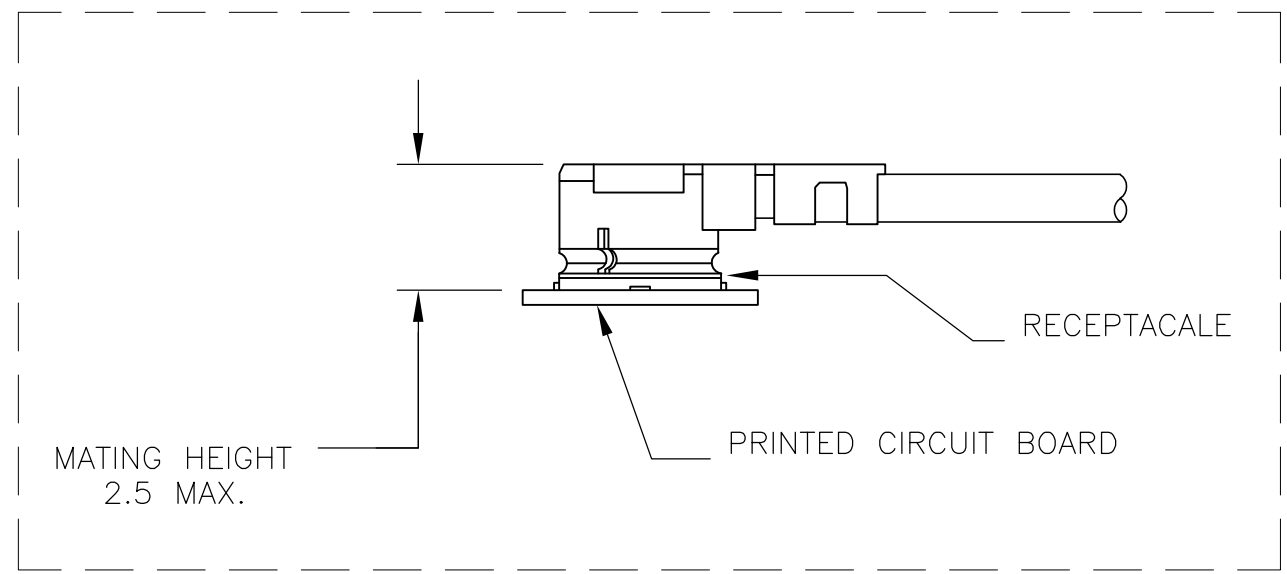

TE P/N	L(mm)
2032440-1	200
2032440-2	370
2032440-4	100
2032440-5	180
2032440-6	120
2032440-7	80

A/R	MR	TUBING, HEAT SHRINK	3
1	PC	SMA, BLKHD, JACK	2
1	PC	UMCC, PLUG [1.37mm CABLE]	1
-*	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	04/DEC/07	TE Connectivity	NAME CABLE ASSY, RF, UMCC PLUG TO SMA BLKHD JACK [1.37mm CABLE]
CHK	04/DEC/07		
APVD	04/DEC/07		
PRODUCT SPEC			
DIMENSIONS: mm [INCHES]		APPLICATION SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		SIZE	RESTRICTED TO
MATERIAL		WEIGHT	
		A3 00779 C-2032440	
		CUSTOMER DRAWING	SCALE N.T.S.
		SHEET 1 OF 1	REV B